

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 006 028 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
07.06.2000 Bulletin 2000/23

(51) Int. Cl.<sup>7</sup>: B60R 25/00, E05B 49/00

(21) Application number: 99116350.2

(22) Date of filing: 19.08.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 02.12.1998 JP 34329698

(71) Applicants:  
• TOYOTA JIDOSHA KABUSHIKI KAISHA  
Aichi-ken 471-8571 (JP)  
• Aisin Seiki Kabushiki Kaisha  
Kariya-shi, Aichi-ken 448-0032 (JP)

(72) Inventors:  
• Tsuchida, Tamotsu  
Toyota-shi, Aichi-ken 471-8571 (JP)

• Yamamoto, Keiji  
Toyota-shi, Aichi-ken 471-8571 (JP)  
• Okada, Hiroki  
Toyota-shi, Aichi-ken 471-8571 (JP)  
• Nomura, Morihito  
Toyoake-shi Aichi-ken 470-1164 (JP)  
• Murakami, Yuichi  
Chiryu-shi, Aichi-ken (JP)


(74) Representative:  
Pellmann, Hans-Bernd, Dipl.-Ing. et al  
Patentanwaltsbüro  
Tiedtke-Bühling-Kinne & Partner  
Bavariaring 4-6  
80336 München (DE)

### (54) Door handle for vehicle and smart entry system for vehicle using the same

(57) A door handle (82) for a vehicle which can miniaturize a transmitter provided on the vehicle and reduce a cost of the system is provided. The door handle (82) includes a handle body (87, 88) which is mounted on an outer face (84) of a door (80) of the vehicle. A least a transmitting antenna (11) of a transmitter (11, 14) which

transmits a radio signal toward outside of the vehicle is integrated with the handle body (87, 88). A smart entry system for a vehicle using the door handle (82) is also provided.

FIG. 4

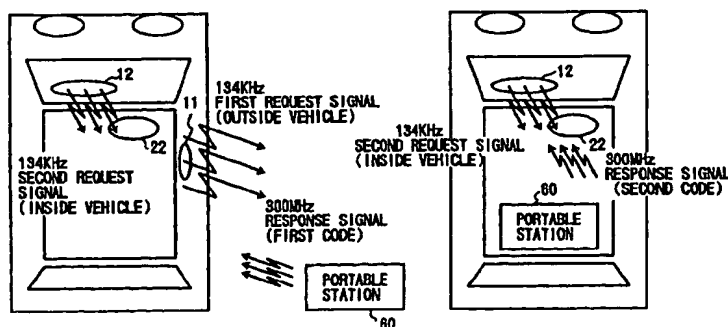

EP 1 006 028 A2

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

[0001] The present invention relates to a door handle for a vehicle, and in particular to a door handle suited to be used in a vehicle which includes a transmitter for transmitting a radio signal. The present invention also relates to a smart entry system for a vehicle using the door handle.

#### 2. Description of the Related Art

[0002] Conventionally, there is known an electronic key system which remote-controls lock/unlock of a door of a vehicle. For example, an electronic key system disclosed in Japanese Laid-Open Patent Application No. 5-156851 includes a wristwatch provided with a transmitter for generating ultrasonic waves modulated with a code for opening/closing operations of a door of a vehicle. A receiver is provided inside a door panel near the door handle for receiving the ultrasonic waves. The code for the opening/closing operations is demodulated from the received ultrasonic waves, and a key actuator is actuated in accordance with the demodulated code.

[0003] Recently, developments have been made of what is called a smart entry system in which a door of a vehicle is unlocked or locked when a user carrying a radio device comes close to or moves away from the vehicle. Such a smart entry system includes an onboard station which is provided on a vehicle and a portable station which is carried by a user. The onboard station transmits a radio request signal, and the portable station transmits a radio response signal including a predetermined code in response to the radio request signal transmitted by the onboard station. When the onboard station receives the radio response signal transmitted by the portable station, the onboard station compares the code included in the received response signal with a specific code. If the received code corresponds to the specific code, the onboard station unlocks the door. Thereafter, when the onboard station no longer receives the radio response signal from the portable station, the door is locked.

[0004] In such a smart entry system, if a transmitting antenna of the onboard station is provided inside a metallic door panel as in a case of the above-mentioned conventional electronic key system, an area in which the transmitted signal can reach (hereinafter referred to as a transmission area  $A_i$ ) becomes narrower as shown in FIG. 1 for a higher frequency of the transmitted signal since the transmitted signal is shaded by the door panel to a greater extent. Thus, in order to enlarge the transmission area  $A_i$ , it is necessary to use a low frequency or large output power for the radio signal to be transmitted. In this case, a scale of a transmission circuit

becomes larger and a cost of the system increases.

### SUMMARY OF THE INVENTION

[0005] It is a first object of the present invention to provide a door handle for a vehicle which can miniaturize a transmitter provided on the vehicle and reduce a cost of the system.

[0006] It is a second object of the present invention to provide a smart entry system for a vehicle which can miniaturize a transmitter of an onboard station and reduce a cost of the system.

[0007] The first object of the present invention can be achieved by a door handle for a vehicle, the door handle comprising:

a handle body which is mounted on an outer face of a door of the vehicle; and

at least a transmitting antenna of a transmitter which transmits a radio signal toward outside of the vehicle, the at least a transmitting antenna being integrated with the handle body.

[0008] The second object of the present invention can be achieved by a smart entry system for a vehicle which includes an onboard station and a portable station, wherein the onboard station comprises:

a transmitter for transmitting a radio request signal via a transmitting antenna, at least the transmitting antenna being integrated with a door handle of the vehicle which is mounted on an outer face of a door of the vehicle; and

a receiver for receiving a radio response signal via a receiving antenna transmitted from the portable station in response to the radio request signal.

[0009] According to the inventions, since the radio signal is transmitted from the transmitting antenna which is integrated with the door handle mounted on an outer face of the door, the transmitted radio signal is not shaded by an outer door panel of the door. Accordingly, the radio signal can be transmitted from the antenna with a high efficiency without usage of a high frequency or a large output power. Thus, it is possible to miniaturize the transmitter and reduce a cost of the system while achieving a wide transmission area.

[0010] Other objects and further features of the present invention will be apparent from the following detailed description when read in conjunction with the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

FIG. 1 is a diagram showing a transmission area achieved by a conventional art;

FIG.2 is a block diagram showing an onboard station of an example of a smart entry system in which a door handle according to the present invention is applied;

FIG.3 is a block diagram showing a portable station of the smart entry system;

FIG.4 is a diagram schematically showing a communication between the onboard station and the portable station;

FIG.5 is a diagram showing a perspective view of a door of a vehicle;

FIG.6 is a diagram showing a cross section of the door handle along a line A-A;

FIG.7 is a diagram showing a cross section of the door handle along a line B-B;

FIG.8 is a diagram showing a perspective view of a first transmitting antenna;

FIG.9 is a diagram showing a perspective view of a handle case of the door handle;

FIG.10 is a block diagram showing a first transmitting part; and

FIG.11 is a diagram showing a transmission area achieved by the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] FIG.2 is a block diagram showing an onboard station 10 of an example of a smart entry system in which a door handle according to the present invention is applied. As shown in FIG.2, the onboard station 10 includes a first transmitting antenna 11 and a second transmitting antenna 12. The first transmitting antenna 11 is provided inside a door handle of a door of a vehicle. On the other hand, the second transmitting antenna 12 is provided near an instrument panel inside a cabin of the vehicle. The first transmitting antenna 11 is connected to a first transmitting part 14, and the second transmitting antenna 12 is connected to a second transmitting part 16. The first transmitting part 14 and the second transmitting part 16 are connected to an ECU (electronic control unit) 20.

[0013] The ECU 20 supplies first and second request codes to the first transmitting part 14 and the second transmitting part 16, respectively. The first transmitting part 14 and the second transmitting part 16 modulate radio signals having a frequency f1 (134 kHz, for example) with the first and second request codes, respectively. The modulated request signals are transmitted from the first transmitting antenna 11 and the second transmitting antenna 12, respectively, toward a portable station 60 which will be described below. It should be noted that the first transmitting part 14 and the second transmitting part 16 may be integrally constructed as a single circuit.

[0014] A receiving antenna 22 is provided inside an inner mirror of the vehicle for receiving a signal having a frequency f2 (300 MHz, for example) transmitted by the

portable station 60. The signal received by the receiving antenna 22 is demodulated in a receiving part 24 and then supplied to the ECU 20.

[0015] A memory 26 is connected to the ECU 20. The memory 26 contains a plurality of different codes stored therein such as a first code for locking the door, a second code for starting an engine and a transponder ID code. The memory 26 is a non-volatile memory such as an EEPROM. Thus, contents stored in the memory 26 are maintained if power supply to the memory 26 is shut off.

[0016] An operation detecting part 28 detects operations of various switches by a user. For example, when the operation detecting part 28 detects an operation of an ignition switch, the operation detecting part 28 supplies a detection signal indicating the operation of the ignition switch to the ECU 20. A door opening/closing detecting part 30 detects opening/closing of a door on a side of a driver seat (or each door of the vehicle) and supplies a detection signal to the ECU 20. A sensor group 32 includes various sensors for detecting a vehicle speed and opening/closing of a window. These sensors supply detection signals to the ECU 20.

[0017] Additionally, a steering lock part 40, an immobilizer part 42 and a door lock part 44 are connected to the ECU 20. The steering lock part 40 mechanically prohibits a steering operation. The immobilizer part 42 prohibits fuel supply and ignition of an engine 50. The door lock part 44 locks and unlocks each door of the vehicle.

[0018] Further, an engine control part 48 is connected to the ECU 20. The engine control part 48 controls a start operation of the engine 50 by means of a cell motor, as well as a regular operation of the engine 50.

[0019] FIG.3 is a block diagram showing the portable station 60 of the smart entry system. As shown in FIG.3, the portable station 60 includes a transmitting antenna 62 and a receiving antenna 64. These antennas 62, 64 are connected to a transmitting/receiving circuit 66. The transmitting/receiving circuit 66 is connected to an ECU 68. When the receiving antenna 64 receives the request signal having the frequency f1 transmitted by the onboard station 10, the received signal is demodulated in the transmitting/receiving circuit 66 and then supplied to the ECU 68.

[0020] A memory 70 is connected to the ECU 68. The memory 70 contains first and second codes stored therein. The first and second codes are read out from the memory 70 and supplied to the transmitting/receiving circuit 66 by the ECU 68. These first and second codes are modulated in the transmitting/receiving circuit 66 and transmitted as a radio signal having the frequency f2 (300 MHz, for example) from the transmitting antenna 62 toward the onboard station 10.

[0021] FIG.4 schematically shows an example of a communication between the onboard station 10 and the portable station 60. As shown in FIG.4, the first and sec-

ond request signals having the frequency f1 are transmitted from the first and second transmitting antennas 11, 12 of the onboard station 10, respectively. When the portable station 60 receives the first request signal (when the portable station 60 is outside the vehicle) or the second request signal (when the portable station 60 is inside the vehicle), the portable station 60 transmits a signal having the frequency f2 which is modulated with the first or second code in accordance with the received request signal. When the signal transmitted by the portable station 60 is received by the receiving antenna 22 provided inside the inner mirror, the received signal is demodulated in the receiving circuit 24 and then supplied to the ECU 20. Thus, the ECU 20 can detect the first or second code transmitted by the portable station 60.

**[0022]** FIG.5 shows a perspective view of a door 80 of the vehicle. As shown in FIG.5, a door handle 82 of a grip type according to the present invention is mounted to a metallic outer door panel 84 of the door 80 so that the door handle 82 projects outwardly in a lateral direction of the vehicle. The door handle 82 has a shape of a bent pipe and is fixed to the outer door panel 84 at both ends thereof. Thus, the door 80 can be opened and closed by gripping a grip part in the intermediate part of the door handle 82 by a human hand.

**[0023]** FIGS.6 and 7 show cross sections of the door handle 82 along a line A-A and a line B-B, respectively. As shown in FIG.6, a handle grip part 86 of the door handle 82 has a hollow structure constituted by a combination of a plastic handle case 87 which is provided on an outer side of the vehicle and a plastic or metallic handle case 88 which is provided on an inner side of the vehicle. The first transmitting antenna 11 is disposed inside the handle grip part 86.

**[0024]** As shown in FIG.7, an arm 90 extends from one end 82A of the door handle 82. The arm 90 is inserted into the door 80 through the outer door panel 84. A tip of the arm 90 is pivotably connected to a pivot shaft 92. On the other side, a lever 94 extends from the other end 82B of the door handle 82. The lever 94 is inserted into the door 80 through the outer door panel 84. A tip of the lever 94 is connected to a door opening/closing mechanism which is not shown in the figures.

**[0025]** When the handle grip part 86 is gripped by a human hand and pulled outwardly in a lateral direction of the vehicle, the lever 94 pivots around the pivot axis 92 in a direction indicated by an arrow X. Thus, the door 80 is opened by the door opening/closing mechanism being actuated. A door key cylinder 96 is mounted to the door 80 near the lever 94 by being inserted into the door handle 82 through the outer door panel 84 so that a key-hole face thereof is exposed outside.

**[0026]** As shown FIGS.6 and 7, the first transmitting antenna 11 is disposed inside the handle grip part 86, and the first transmitting part 14 (including a current detecting circuit 122 which will be described below) is

mounted on an inner side of the outer door panel 84. The first transmitting antenna 11 and the first transmitting part 14 are connected by a wire harness 98 which extends inside the door handle 82 and the arm 90. Additionally, the first transmitting part 14 is connected to the ECU 20 by a wire harness 100.

**[0027]** FIG.8 shows a perspective view of the first transmitting antenna 11. As shown in FIG.8, a case 102 which is made of resin has an elongated plate-like shape with a center part thereof being cut out. A ferrite plate 104 is supported in the cut-out part of the case 102. A coil 106 is wound around a peripheral edge of the case 102. The coil 106 is connected to a condenser 108 and the wire harness 98 to constitute the transmitting antenna 11. The condenser 108 is disposed adjacently to the case 102 in a longitudinal direction of the case 102. It should be noted that the case 102 may be made of ferrite. In this case, it is not necessary to cut out the center part of the case 102.

**[0028]** In an assembling process of the door handle 82, the first transmitting antenna 11 is fitted and fixed in an antenna containing part 110 provided inside the metallic handle case 88 shown in FIG.9. Then, the antenna containing part 110 is filled with a waterproofing material (silicone, for example). Thereafter, the plastic handle case 87 is mounted to the handle case 88 to form the handle 82.

**[0029]** As shown in FIG.10, the first transmitting part 14 is provided with the current detecting circuit 122 in addition to a transmitting circuit 120. The current detecting circuit 122 detects a current flowing through the first transmitting antenna 11. When a human hand touches the handle grip part 86 to open the door 80, a stray capacitance of the first transmitting antenna 11 increases so that a current flowing through the first transmitting antenna 11 momentarily changes. The current detecting circuit 122 detects a contact of a human hand to the handle grip part 86 by detecting the above-mentioned current change and supplies a detection signal to the ECU 20.

**[0030]** As mentioned above, the first transmitting antenna 11, which is a part of a transmitter, is disposed inside the door handle 82 which outwardly projects from the door 80 so that the transmitting antenna 11 is positioned outside the door 80. Since the request signal can be transmitted from the first transmitting antenna 11 through the plastic handle case 87, the request signal is not shaded by the door 80. Thus, it is possible to use a relatively high frequency and relatively small output power for the request signal while achieving a wide transmission area Ai as shown in FIG.11. Additionally, the door handle 82 can be miniaturized since only the first transmitting antenna 11 is disposed inside the door handle 82.

**[0031]** In the above-mentioned embodiment, the receiving antenna 22 is disposed inside the inner mirror of the vehicle. However, the receiving antenna 22 may be disposed at any position where radio signals from

outside the vehicle can be received. For example, the receiving antenna 22 may be provided at a center of the vehicle so as to be used as a common antenna for both sides of a driver seat and a passenger seat, or the receiving antenna 22 may be separately provided to each side of a driver seat and a passenger seat inside the door handle or the door.

[0032] The present invention is not limited to these embodiments, but variations and modifications may be made without departing from the scope of the present invention.

[0033] The present application is based on Japanese priority application No. 10-343296 filed on December 2, 1998, the entire contents of which are hereby incorporated by reference.

[0034] A door handle (82) for a vehicle which can miniaturize a transmitter provided on the vehicle and reduce a cost of the system is provided. The door handle (82) includes a handle body (87, 88) which is mounted on an outer face (84) of a door (80) of the vehicle. A least a transmitting antenna (11) of a transmitter (11, 14) which transmits a radio signal toward outside of the vehicle is integrated with the handle body (87, 88). A smart entry system for a vehicle using the door handle (82) is also provided.

#### Claims

1. A door handle (82) for a vehicle, characterized by comprising:
  - a handle body (87, 88) which is mounted on an outer face (84) of a door (80) of the vehicle; and
  - at least a transmitting antenna (11) of a transmitter (11, 14) which transmits a radio signal toward outside of the vehicle, said at least a transmitting antenna (11) being integrated with said handle body (87, 88).
2. The door handle (82) for a vehicle as claimed in claim 1, characterized in that said at least a transmitting antenna (11) is disposed inside said handle body (87, 88).
3. The door handle (82) for a vehicle as claimed in claim 2, characterized in that said handle body comprises:
  - a first part (87) which is made of electrically insulating material; and
  - a second part (88) which is fixed to said first part (87) so that a hollow space is formed between said first and second parts, wherein said at least a transmitting antenna (11) is disposed in said hollow space.
4. The door handle (82) for a vehicle as claimed in claim 1, characterized by further comprising:
  - a contact detector (122) which detects a contact of a human hand to said door handle (82).
5. The door handle (82) for a vehicle as claimed in claim 4, characterized in that said contact detector (122) detects a contact of a human hand to said door handle (82) based on a current flowing through said transmitting antenna (11).
6. The door handle (82) for a vehicle as claimed in claim 1, characterized in that said transmitter (11, 14) constitutes a part of an onboard station (10) of a smart entry system.
7. The door handle (82) for a vehicle as claimed in claim 6, characterized in that said radio signal is a request signal to be received by a portable station (60) of the smart entry system.
8. The door handle (82) for a vehicle as claimed in claim 1, characterized in that said transmitting antenna (11) comprises:
  - a coil (106) which is wound around a magnetic core (104); and
  - a condenser (108) which is connected to said coil (106).
9. The door handle (82) for a vehicle as claimed in claim 8, characterized in that said magnetic core (104) has an elongated shape and said condenser (108) is disposed adjacently to said coil (106) in a longitudinal direction of said magnetic core (104).
10. A smart entry system for a vehicle which includes an onboard station (10) and a portable station (60), characterized in that said onboard station (10) comprises:
  - a transmitter (10, 14) for transmitting a radio request signal via a transmitting antenna (11), at least said transmitting antenna (11) being integrated with a door handle (82) of the vehicle which is mounted on an outer face (84) of a door (80) of the vehicle; and
  - a receiver (22, 24) for receiving a radio response signal via a receiving antenna (22) transmitted from said portable station (60) in response to said radio request signal.
11. The smart entry system for a vehicle as claimed in claim 10, characterized in that said transmitting antenna (11) is disposed inside said door handle (82).
12. The smart entry system for a vehicle as claimed in claim 11, characterized in that said door handle (82) comprises:

a first part (87) which is made of electrically insulating material; and

a second part (88) which is fixed to said first part so that a hollow space is formed between said first and second parts,

wherein at least said transmitting antenna (11) is provided in said hollow space.

13. The smart entry system for a vehicle as claimed in claim 10, characterized by further comprising:

a contact detector (122) which detects a contact of a human hand to said door handle (82).

14. The smart entry system for a vehicle as claimed in claim 13, characterized in that said contact detector (122) detects a contact of a human hand to said door handle (82) based on a current flowing through said transmitting antenna (11).

15. The smart entry system for a vehicle as claimed in claim 10, characterized in that said receiving antenna (22) is disposed inside an inner mirror of the vehicle.



FIG.1 PRIOR ART

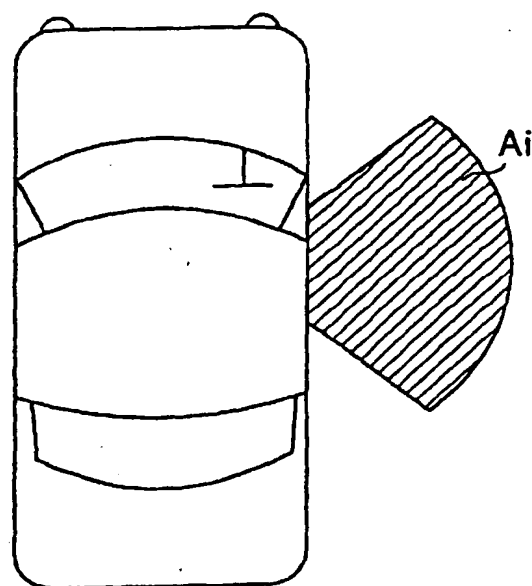


FIG. 2

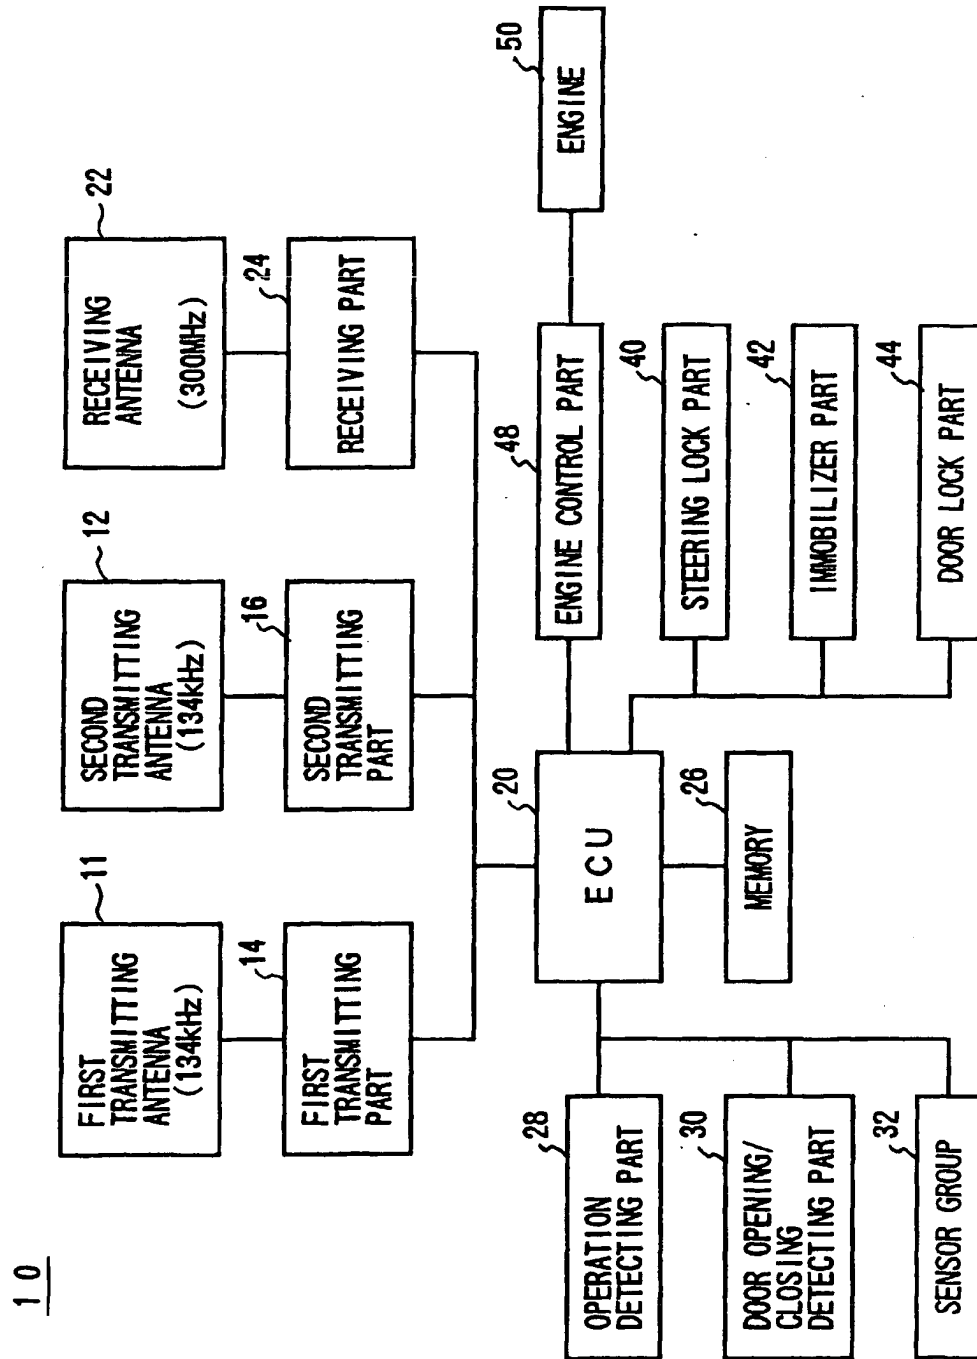


FIG. 3

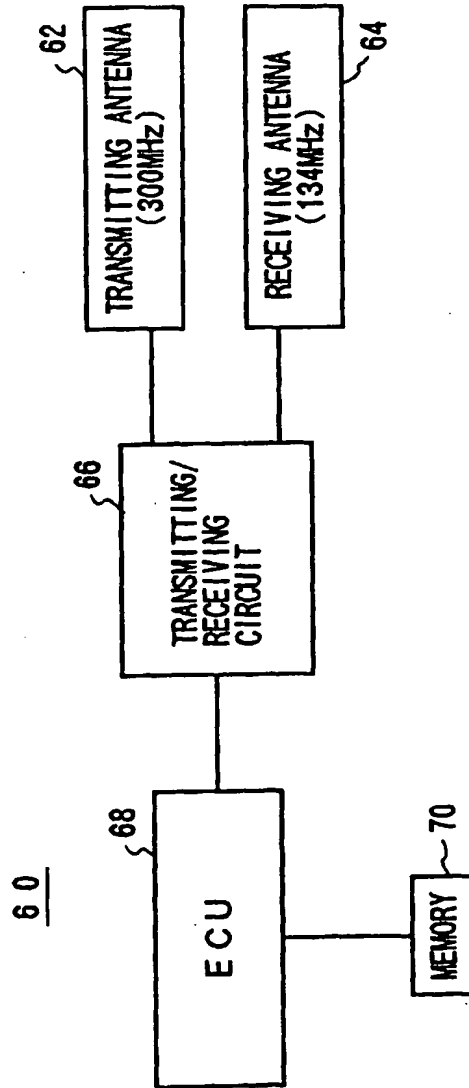


FIG. 4

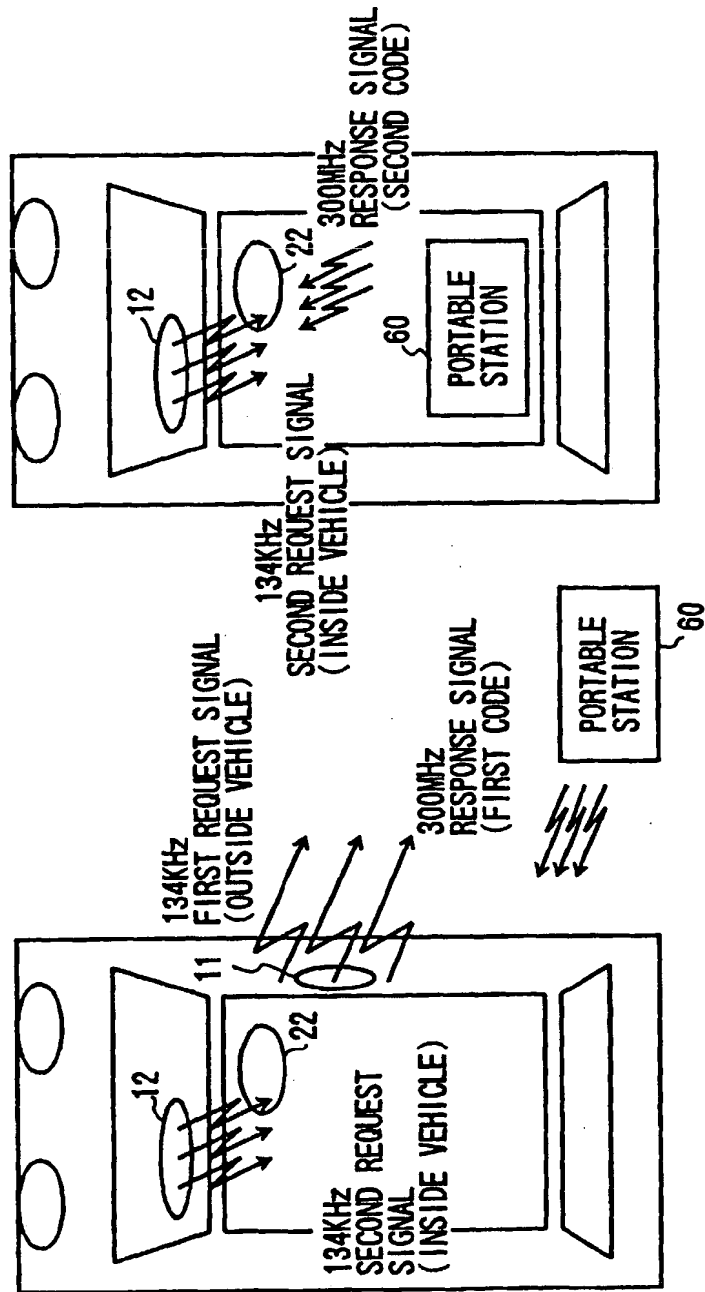


FIG.5

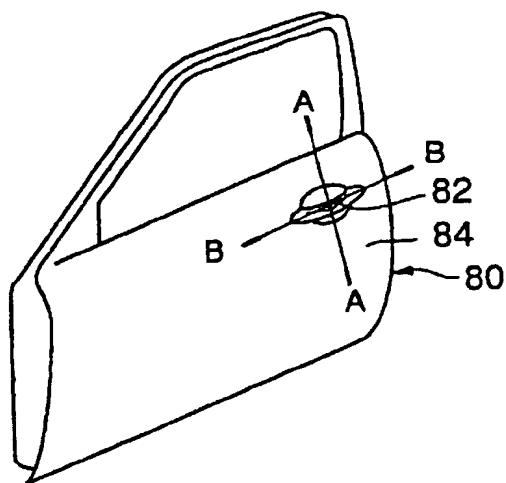
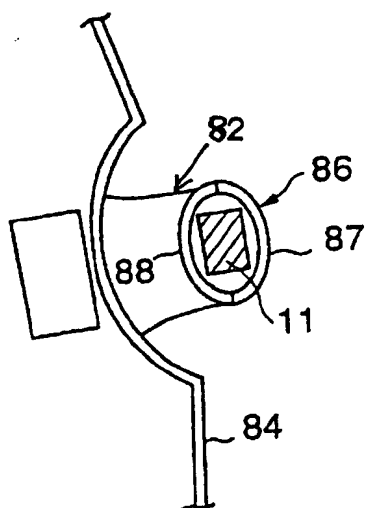


FIG.6



**FIG. 7**

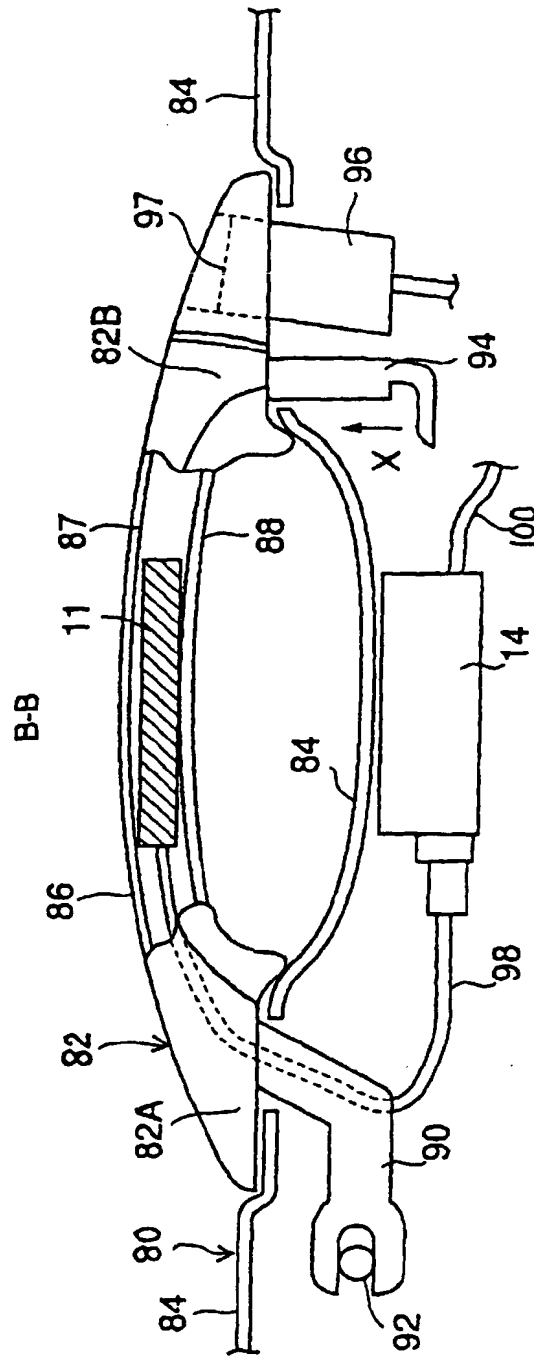


FIG.8

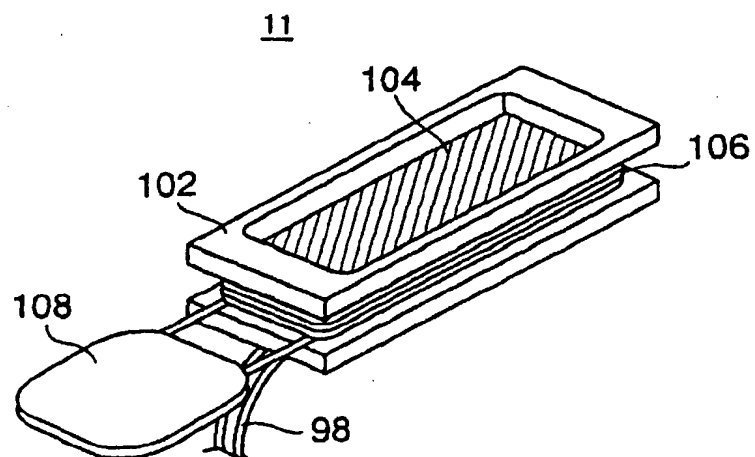


FIG.9

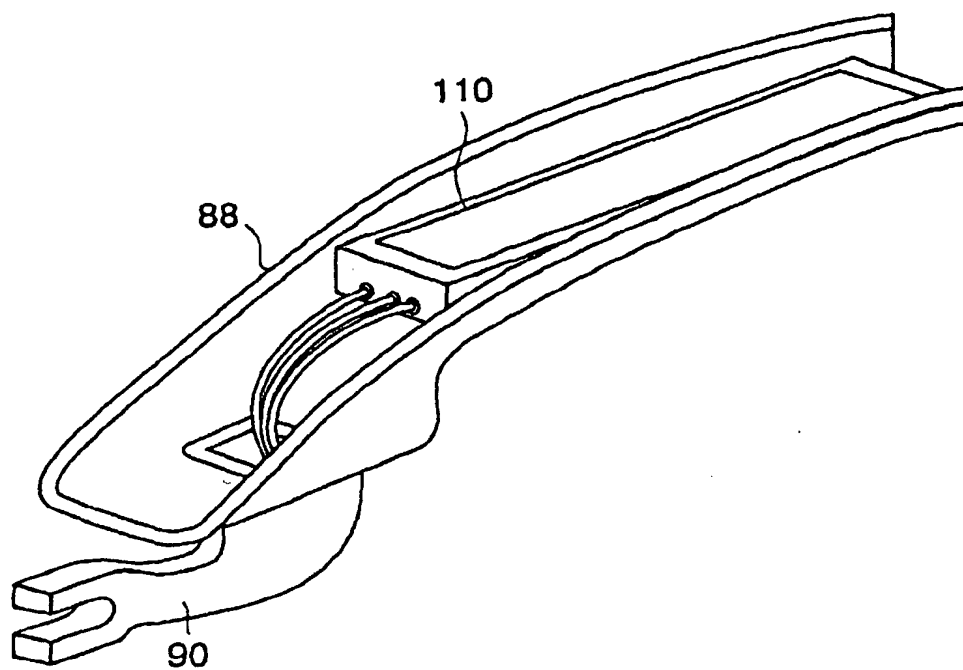


FIG. 10


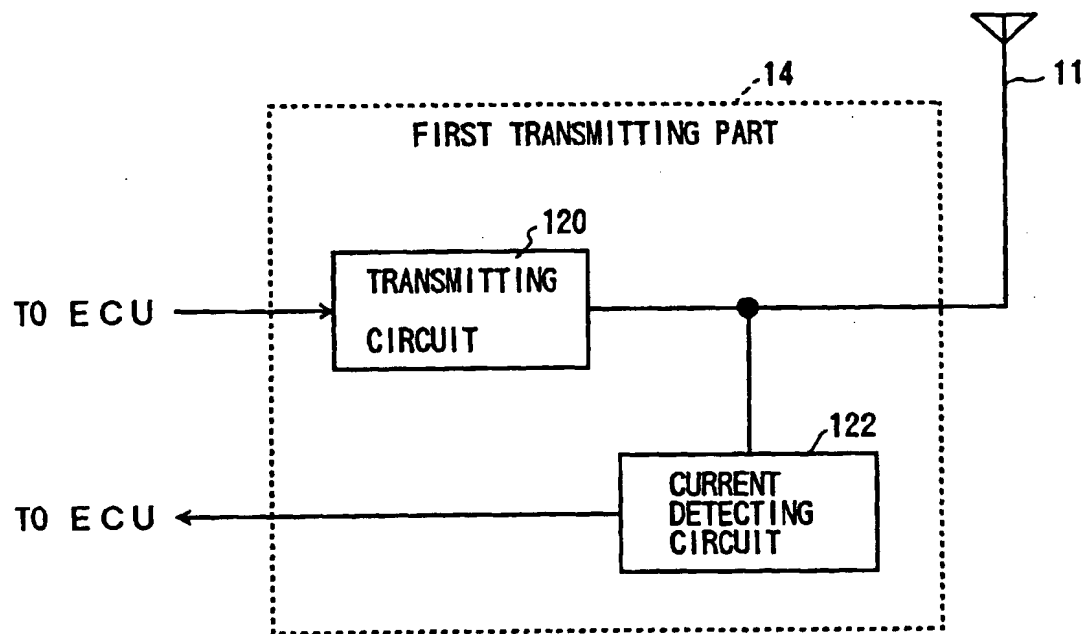




FIG.11





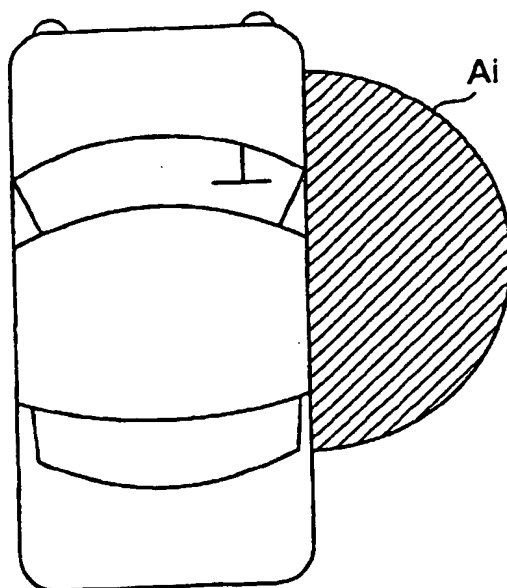

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**17.12.2003 Bulletin 2003/51**

(51) Int Cl.7: **B60R 25/00, E05B 49/00,  
E05B 65/20, G07C 9/00**

(43) Date of publication A2:  
**07.06.2000 Bulletin 2000/23**

(21) Application number: **99116350.2**

(22) Date of filing: **19.08.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Yamamoto, Keiji  
Toyota-shi, Aichi-ken 471-8571 (JP)
- Okada, Hiroki  
Toyota-shi, Aichi-ken 471-8571 (JP)
- Nomura, Morihito  
Toyoake-shi Aichi-ken 470-1164 (JP)
- Murakami, Yuichi  
Chiryu-shi, Aichi-ken (JP)

(30) Priority: **02.12.1998 JP 34329698**

(71) Applicants:  
• **TOYOTA JIDOSHA KABUSHIKI KAISHA**  
Aichi-ken 471-8571 (JP)  
• **Aisin Seiki Kabushiki Kaisha**  
Kariya-shi, Aichi-ken 448-0032 (JP)

(74) Representative:  
**Pellmann, Hans-Bernd, Dipl.-Ing. et al**  
**Patentanwaltsbüro**  
**Tiedtke-Bühling-Kinne & Partner**  
**Bavariaring 4-6**  
**80336 München (DE)**


(72) Inventors:  
• **Tsuchida, Tamotsu**  
**Toyota-shi, Aichi-ken 471-8571 (JP)**

(54) **Door handle for vehicle and smart entry system for vehicle using the same**

(57) A door handle (82) for a vehicle which can miniaturize a transmitter provided on the vehicle and reduce a cost of the system is provided. The door handle (82) includes a handle body (87, 88) which is mounted on an outer face (84) of a door (80) of the vehicle. A least a

transmitting antenna (11) of a transmitter (11, 14) which transmits a radio signal toward outside of the vehicle is integrated with the handle body (87, 88). A smart entry system for a vehicle using the door handle (82) is also provided.

**FIG. 4**

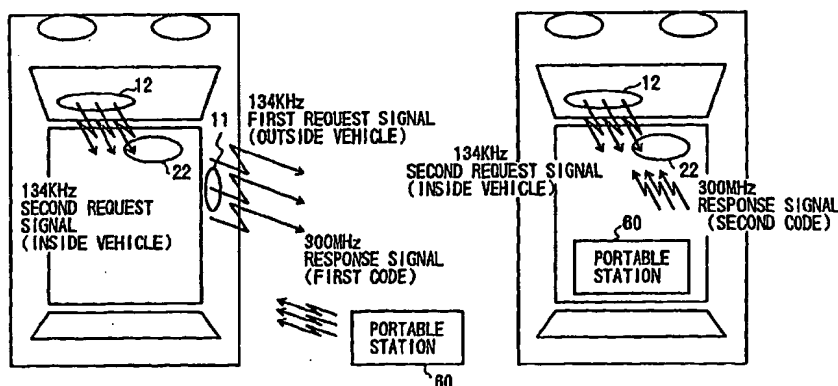



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 11 6350

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 844 470 A (GARNAULT JOEL ET AL) 1 December 1998 (1998-12-01) * abstract; claim 15; figures 1-4 * * column 3, line 39 - line 55 * * column 4, line 56 - column 5, line 9 * * column 7, line 40 - line 42 *	1-3,6-11	B60R25/00 E05B49/00 E05B65/20 G07C9/00
Y	---	4,13,15	
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 11, 28 November 1997 (1997-11-28) -& JP 09 189156 A (TOKAI RIKI CO LTD), 22 July 1997 (1997-07-22) * abstract; figures *	1-3,6-8, 10,11	
X	GB 2 317 037 A (TOKAI RIKI CO LTD) 11 March 1998 (1998-03-11) * abstract; figure 1 * * page 4, line 5 - line 6 *	1-3,8, 10,11	
Y	WO 97 41322 A (LANGE STEFAN ; DEN BOOM ANDREAS VAN (DE); HUELSBECK & FUERST (DE)) 6 November 1997 (1997-11-06) * abstract; figures * * page 3, last paragraph - page 4, paragraph 2 * * page 5, paragraph 1 * * page 6, paragraph 1 - paragraph 3 *	4,13	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  E05B H01Q G07C
A	MOTOKI HIRANO ET AL: "KEYLESS ENTRY SYSTEM WITH RADIO CARD TRANSPONDER", IEEE TRANSACTIONS ON INDUSTRIAL ELECTRONICS, IEEE INC. NEW YORK, US, VOL. 35, NR. 2, PAGE(S): 208-216 XP000096890 ISSN: 0278-0046 * abstract; figures 10,12 * ---	8	
-/--			
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>27 October 2003</b>	Examiner <b>Buron, E</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P4/C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 11 6350

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	EP 0 860 325 A (DONNELLY CORP) 26 August 1998 (1998-08-26) * abstract; figure 1 *	15	
X,P	WO 99 19585 A (HUF HUELSBECK & FUERST GMBH ;KEMMANN HARALD (DE); LANGE STEFAN (DE) 22 April 1999 (1999-04-22) * abstract; figures * * page 4, line 13 - page 6, line 19 *	1-4,6,7, 10-13	
E	EP 0 955 431 A (VALEO SECURITE HABITACLE) 10 November 1999 (1999-11-10) * abstract *	1,2,10, 11	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search THE HAGUE		Date of completion of the search 27 October 2003	Examiner Buron, E
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03/02) (P04001)

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 99 11 6350

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-10-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5844470	A	01-12-1998	FR 2750155 A1	26-12-1997
			DE 69712135 D1	29-05-2002
			DE 69712135 T2	02-01-2003
			EP 1138853 A2	04-10-2001
			EP 0816597 A1	07-01-1998
			ES 2175220 T3	16-11-2002
JP 09189156	A	22-07-1997	NONE	
GB 2317037	A	11-03-1998	JP 10079986 A	24-03-1998
			DE 19738560 A1	12-03-1998
WO 9741322	A	06-11-1997	DE 19617038 A1	06-11-1997
			AU 731480 B2	29-03-2001
			AU 2637997 A	19-11-1997
			BR 9708868 A	03-08-1999
			CN 1216593 A ,B	12-05-1999
			DE 19745149 A1	15-04-1999
			DE 59706016 D1	21-02-2002
			WO 9741322 A1	06-11-1997
			EP 0895559 A1	10-02-1999
			ES 2166535 T3	16-04-2002
			JP 2000509121 T	18-07-2000
			PT 895559 T	28-06-2002
			US 6075294 A	13-06-2000
EP 0860325	A	26-08-1998	US 5798688 A	25-08-1998
			DE 69809612 D1	09-01-2003
			DE 69809612 T2	14-08-2003
			EP 0860325 A2	26-08-1998
			ES 2189118 T3	01-07-2003
WO 9919585	A	22-04-1999	DE 19745149 A1	15-04-1999
			BR 9813042 A	15-08-2000
			WO 9919585 A1	22-04-1999
			EP 1023511 A1	02-08-2000
			JP 2001520337 T	30-10-2001
EP 0955431	A	10-11-1999	FR 2778427 A1	12-11-1999
			DE 69909675 D1	28-08-2003
			EP 0955431 A1	10-11-1999

EPC FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82